


N E X T

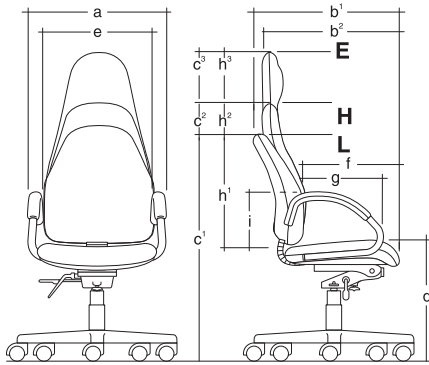

Dimensions

Models 30 arms.

a : 24" (610 mm)	f : 17½" (445 mm)
b ¹ : 24½" (622 mm)	g : 14" (356 mm)
b ² : 23¾" (603 mm)	h ¹ : 16" (406 mm)
c ¹ : 33½" (850 mm)	h ² : 21" (533 mm)
c ² : 38½" (980 mm)	h ³ : 27" (686 mm)
c ³ : 45" (1140 mm)	h ⁴ : 30" (762 mm)
c ⁴ : 48" (1220 mm)	i : 8½" (216 mm)
d : 18" (458 mm)	
e* : 19½" (495 mm)	

e* : distance between armrests

Width and depth of seat :

Regular seat : 20" x 19" (508x483mm)

Large seat : 21" x 20" (533x508mm)

Small seat : 19" x 18" (483x457mm)

Models without arms on sleigh base:

Width: 22" (559 mm)

Depth: 23½" (597 mm)

Dimensions may vary depending on how the seat is adjusted and what type of material is used.

Specifications

The NEXT Series offers several models of seats, chairs and armchairs with four backrests heights: low (L), high (H) and Exec (E), models on sleigh base or on central base, and stools. They are built according to the A.D.I. patented "suspension" technique.

The seat and back are made of 5/8" diameter (16 mm) 14-gauge bent steel tubes. The seat frame includes two 3/16" thick (5 mm) steel plates welded to the tubes to which are fastened the armrests, the sleigh base and the 12 gauge (2,7mm) ribbed galvanized steel bridge required for the central base.

The back frame includes widthwise a ¼" thick x 2" flat steel (6 x 50 mm) welded to the tube to which the backrest support is fastened. This steel plate is also included on the seat frames of chairs which have a fixed backrest.

The fixed and adjustable backrest support consists of a ¼" x 3" (6 x 76mm) high strength (HSLA) steel blade. The fixed support is screwed to the backrest and under the seat and the adjustable support is screwed to the backrest and attached to the mechanism. Self tapping screws are used.

Flexible woven plastic belts are slipped onto the frames and pulled taut. The backrest, with 2"x 3½" (51x89mm) foam comfort strips at the lumbar level, is covered with fire retardant 1¾" thick (44mm) medium-density polyurethane foam. The rear of the backrest is covered with ¾" thick (19mm) foam. The seat surface consists of a cushion 2¾" (70mm) thick of fire retardant urethane foam.

Fabric, vinyl or leather covers complete the upholstery and are held in place with zippers located along the bottom edge of the backrest and under the seat. An optionnal pillow attached to the back, made of 2½" (64mm) memory foam is available on Exec models.

Sleigh bases are made 1" diameter (25 mm) 14-gauge tubular steel reinforced at the front elbows with ¾" diameter (19 mm) 16-gauge steel tubes. They are fitted with four glides.

The sleigh base, mechanisms and arms are screwed under the seat.

All wells are the G.M.A.W type.

Models with the Exec high-back are equipped a 26" (660mm) nylon resin base. All other are equipped with the 24" (610mm) diameter nylon resin base. All are mounted on 2¼" diameter (55 mm) hooded double-wheel casters.

NEXT chairs meet the BIFMA/ANSI x5.1 2002 standards and are Greenguard certified.



ART DESIGN INTERNATIONAL

3450, 1ÈRE RUE, ST-HUBERT (QUÉBEC), CANADA J3Y 8Y5

TEL. (450) 926-1004 1-800-663-6794 FAX (450) 926-0013 1-888-407-6435

e-mail : info@adi-artdesign.com

PRINTED IN CANADA